




255 C

Pentair Water® offers a full range of Autotrol® Control Valves to meet all residential water conditioning applications.

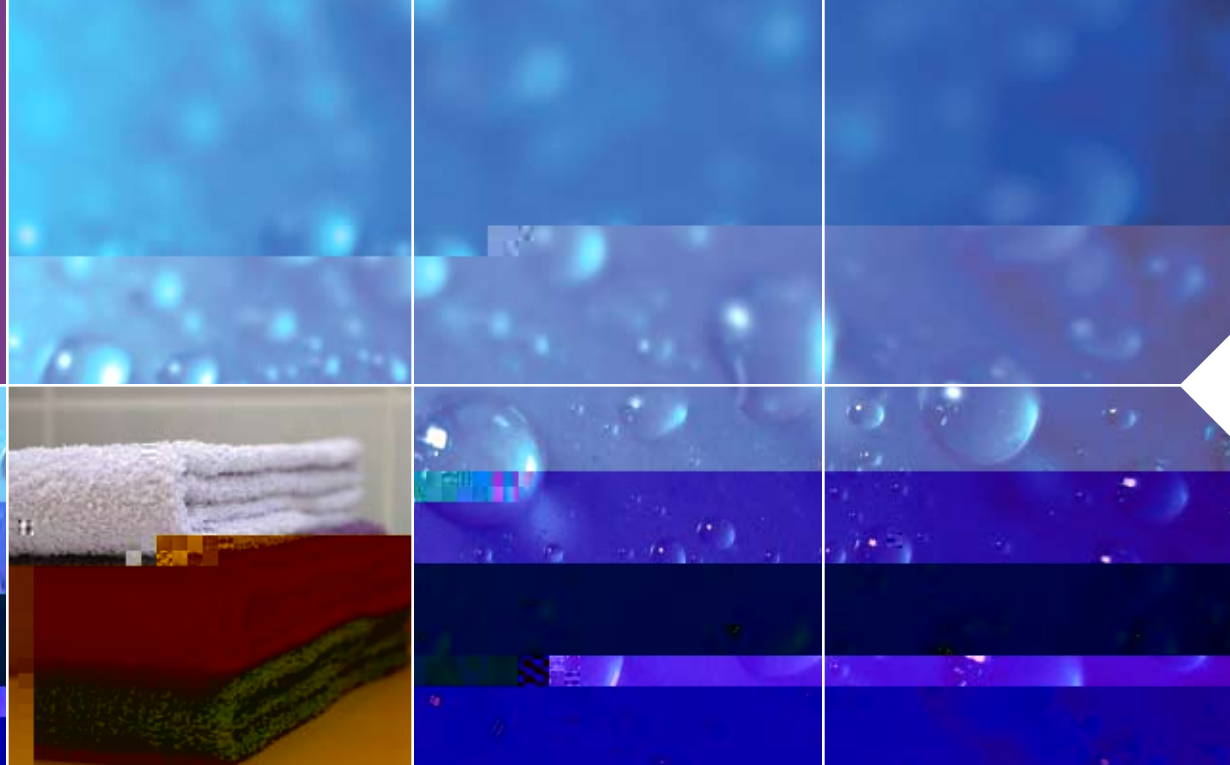

- Simple, economic electronic time clock (chronometric)
- 7- or 99-day regeneration setting
- High efficiency regeneration sequence
- 12-volt operation
- Filter or conditioner setting in one control
- Operates 255, 263, 268 with one controller

762 Demand

Same features as the 760, plus:

- Fully programmable cycle times
- Salt setting in 1-pound increments
- Optional no-salt detector
- Operates 255, 263, 268, 278, and Magnum IT with one controller

742 Time Clock

Same features as the 740 Time Clock, plus:

- Fully programmable cycle times
- Salt setting in 1-pound increments
- Optional no-salt detector • 12-volt operation
- 28-day variable reserve
- High efficiency regeneration sequence
- Automatic capacity calculations

764 Demand

Operates 255, 263, 268 with one controller

Same features as the 762, plus:

- Multi-tank applications (twin alternating, multi-tank parallel)
- Control lockout
- Remote regeneration



Autotrol
Pentair Water

Electrical

Controller Operating Voltage	12 Volt – AC (Requires use of Pentair Water®-supplied transformer)
Input Supply Frequency	50 or 60 Hz (Controller configuration dependent)
Motor Input Voltage	12 Volt – AC
Controller System Power Consumption	3 Watts average

Transformer – All Controllers

All Controllers require the use of a Pentair Water-supplied transformer.

Transformer Output Voltage	12 Volt – AC 400mA
Transformer Input Options	115 Volt – AC 50/60 Hz; 230 Volt – AC 50/60 Hz; 100 Volt – AC 50/60 Hz
Transformer Plug Options	Indoor North American Plug Taiwan/Korea Plug
	Outdoor North American Australian Plug
	(UL Listed for outdoor use) United Kingdom Plug
	Japanese Plug Mainland Europe Plug



Dimensions

Valve Connections

Tank Thread	2-1/2-inches – 8, male	Brine Line	1/4-inch or 3/8-inch NPT, male; air check built into valve
Inlet/Outlet Manifold <i>(brass or thermoplastic)</i>	1-inch NPT or BSPT, female 3/4-inch NPT or BSPT, female 3/4-inch NPT or BSPT, male (thermoplastic) 1/2-inch NPT or BSPT, male (thermoplastic)	Distributor Tube <i>(diameter)</i>	1.050 inches (27 mm) or 13/16-inch (20.6 mm)
Drain Line	1/2-inch (manifold dependent)	Distributor Tube <i>(length)</i>	1-1/8 ± 1/8 inches (29 mm ± 3 mm) above top of tank



Injector* Performance
Logix™



20580 E. 1st A
Bldg., I 53045
☎ : 262.784.4490
F : 262.784.7794

5730 N. G. P.
Mn., I 53209
☎ : 262.238.4400
F : 262.238.4402

2010 P. 1st F. 1st, LLC
1018069 - D FE10

C C : 800.279.9404